



High breathable monolithic film based roofing underlay

PRODUCT DESCRIPTION

JUTA MONO EASY 0 is manufactured by extrusion coating of special polymer in between two layers of non-woven spun bonded polypropylene to create a weatherproof breathable membrane.

- In a pitched roof construction **JUTA MONO EASY 0** is suitable for both supported and unsupported use, and also with sarking boards. **JUTA MONO EASY 0** can be laid directly over thermal insulation with no requirement for ventilation space, meaning that the full height of the rafters can be used for insulation.
- **JUTA MONO EASY 0** is durable membrane combining excellent water-resistance with high vapour permeability, making it particularly versatile and suited to a wide range of applications. Its benefit is improved resistance against wood treatment chemicals, widely used for wood impregnation. **JUTA MONO EASY 0** offers year-round protection in all weather conditions against leakages and water vapour condensation.
- **JUTA MONO EASY 0** is available with single or double integrated tape upon request.
- **JUTA MONO EASY 0** can be tailored to your requirements in regards to colour, design and palletisation.
- **JUTA MONO EASY 0** is naturally mould and rot resistant.
- **JUTA MONO EASY 0** fully conforms to EN 13859-1.


STORAGE

- Rolls should be stored flat on a clean, level surface, and kept away from sunlight

ROLL SPECIFICATION

WIDTH OF MEMBRANE	1.5 m*
LENGTH OF ROLL	50 m*
ROLL WEIGHT	12 kg
PACKAGING	Each roll is labelled and wrapped in a polyethylene film and stored horizontally, fastened, and wrapped on wooden pallets.

* Other roll sizes are available upon request

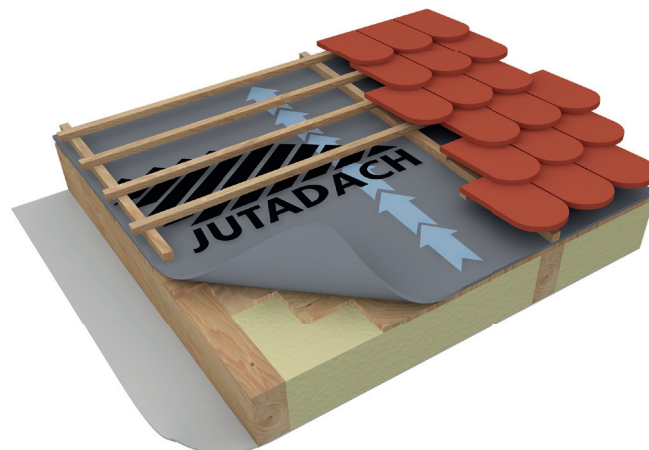

INSTALLATION

- Prior to the installation of **JUTA MONO EASY 0** ensure all surfaces to be covered are firmly fixed, clean and smooth.
- To install, **JUTA MONO EASY 0** should be laid horizontally across the roof slope over boarding, insulation or rafters and fixed with non corrosive flat-headed nails or staples. Batten spacing should not exceed 1.2 m.
- Counter battens are then installed over the underlay, and fixed through to the rafters. The battens for tiling are fixed to the counter battens leaving space between the underlay and the battens for drainage and air ventilation.
- **JUTA MONO EASY 0** should be laid loose, flat and without wrinkles.
- Where possible the number of laps should be kept to a minimum by using full lengths of sheeting. Laps should be a minimum of 150 mm dependant on the pitch of the roof.
- Laps should be preferably sealed with integrated single or double tape. Simply peel off the liner and fix the overlaps applying manual pressure.
- It is suggested to cover **JUTA MONO EASY 0** with roofing without delay.
- Attention to detail is important. Free drainage of water and air ventilation is necessary.

✖ This is an indicative document, which does not substitute the installation guideline. When installing this product, local building installation regulations and instructions must be taken into account.