



Ultimate roofing underlay for pitched roof construction

PRODUCT DESCRIPTION

JUTADACH THERMOISOL NP is manufactured as two layer underlay composed of top breathable, but rain-tight coating based on polyurethane, onto special nonwoven carrier, to form weather-proof breathable roofing underlay.

- **JUTADACH THERMOISOL NP** is designed for installations in ventilated supported roof constructions, especially for fully insulated boarded pitched roofs. Top functional layer makes the product extremely weather resistant, without compromising the breathability, bottom nonwoven layer ensures ultimate tear, nail tear and puncture resistance.


- **JUTADACH THERMOISOL NP** is recommended as prime class of roofing underlay for demanding uncompromising applications. Improved resistance against chemical wood treatments. It creates weather-proof shell working under all-year-round conditions, supporting right functionality of thermal insulations by eliminating the leakages and condensations. Naturally air-tight, special design of integrated tapes allows perfect sealing of the overlaps. Embossed anti-slip grid surface allowing straight cuts, easy-to-handle product.

- **JUTADACH THERMOISOL NP** is available with single or double integrated tape upon request.

- **JUTADACH THERMOISOL NP** can be tailored to your requirements in regards to colour, design and palletisation.

- **JUTADACH THERMOISOL NP** is naturally mould and rot resistant.

- **JUTADACH THERMOISOL NP** fully conforms to EN 13859/1.

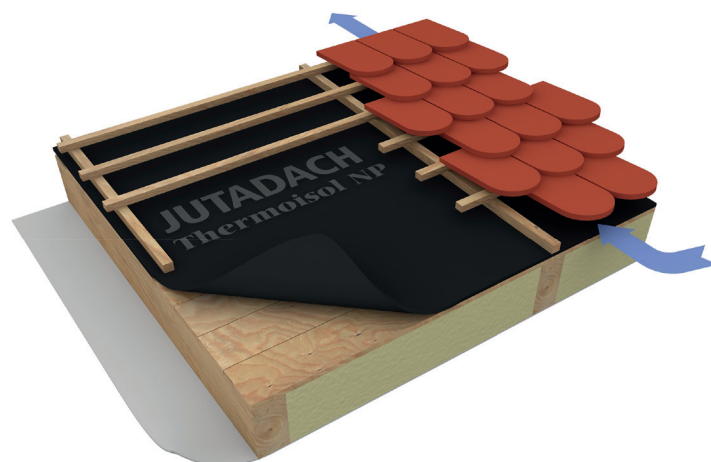

INSTALLATION

- Before installation of **JUTADACH THERMOISOL NP** ensure surface is firmly fixed, clean, dry and smooth..

- To install, **JUTADACH THERMOISOL NP** should be laid horizontally across roof construction by simple unrolling, with appropriate overlap and fixed with non-corrosive flat-headed nails or staples. The overlaps are sealed by integrated tapes. Simply peel off the liner and fix the overlaps, applying manual pressure. Counter battens are then installed over the underlay, and fixed through. The battens for roofing are fixed to the counter battens leaving space between the underlay and the battens for drainage and air ventilation.

- **JUTADACH THERMOISOL NP** should be installed loose, flat and without wrinkles. Where possible the number of laps should be kept to a minimum by using full lengths of sheeting.

- It is suggested to cover **JUTADACH THERMOISOL NP** by roofing without delay.

- Attention to detail is important. Free drainage of water and air ventilation is necessary.

⚠ This is an indicative document, which does not substitute the installation guideline. When installing **JUTADACH THERMOISOL NP**, local building installation regulations and instructions must be taken into account.

STORAGE

- Rolls should be stored flat on a clean, level surface, and kept away from sunlight.

ROLL SPECIFICATION

WIDTH OF MEMBRANE	1.5 m*
LENGTH OF ROLL	50 m*
ROLL WEIGHT	15 kg
PACKAGING	Each roll is labelled and wrapped in polyethylene sleeve and stored horizontally, fastened, and wrapped on wooden pallets.

* Other roll sizes are available upon request